

ExoTrol[®]

ExoTrol PRO - control system



- Two version for control of maximum five heat pumps
- Two solar energi collectors can be controlled
- The standard version can control three shunt circuits
- Monotoring possible via internet and intranet

EXOTROL PRO - THE USERFRIENDLY CONTROL SYSTEM


ExoTrol Pro is available in two versions; one for control of maximum three heat pumps and one for maximum five heat pumps, connected to one or two accumulator tanks. ExoTrol Pro controls up to three different forms of energy with power supply from a separate cabinet. ExoTrol Pro has a large number of presets and several additional functions can be programmed. Floating or fixed condensing can be applied up to the regulation point. ExoTrol Pro is easy to connect via ModBus communication, 3G router or fixed network for monitoring as well as regulation.



Cabinet. Euronom has developed a solution with separated control and power current, which simplifies maintenance and installation of options.



Operation panel. Touch screen for easy adjustment of settings.

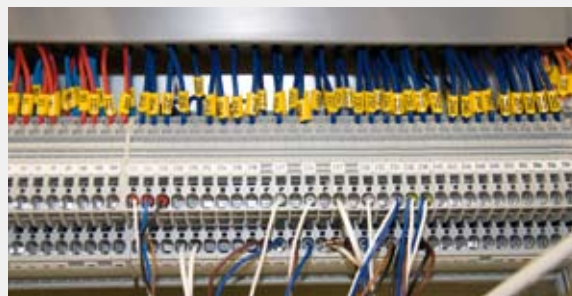

Electronics. Easy installation with terminals for all external connection.

MODEL	Pro-3	Pro-5	
Heat pumps	max 3	max 5	pcs
Shunt controls	2	3	pcs
Extra shunt controls	option	option	-
Solar energy control	option (max 2)	option (max 2)	pcs
Heating volume indicator	option	option	-
Additional energy	2 steps	3 steps	pcs
Additional functions	option	option	-
Dimensions	600x800x260	800x800x260	mm
Weight	42	54	kg

The above data only includes control functions in the cabinet. Actuators, sensors, flow meters etc. are offered separately.



FOR MORE INFORMATION: www.euronom.se

Vibra.se

FLAP: 18-0912-362